

# SPIN 15

Continuous mixer for premixed materials and fine mortar

## Standard Equipment

- ✓ Single-phase motor 230V/50Hz – 1.4 kW
- ✓ Hopper with bag-breaker galvanized grid
- ✓ Removable mixing chamber
- ✓ Mixing shaft with wear-resistant steel paddles
- ✓ Fine mortar mixing kit (standard for Spin 14A Cappotto version)
- ✓ Electric control panel
- ✓ Water system
- ✓ Water pump (standard for Spin 15 A version)
- ✓ 10-m water hose with quick couplings
- ✓ Packing: in cardboard



## NO LIMIT WITH PRE-MIXED MATERIALS IN BAGS

- ✓ Plasters
- ✓ Masonry mortars
- ✓ Conventional screeds
- ✓ Self-levelling screeds

## APPLICATIONS

### Spin 15 / Spin 15A

for mixing quickly:

- Premixed plasters
- Masonry mortars
- Self-levelling materials
- Premixed materials in bags for conventional floor-screeds
- Fine mortar for laying thermal insulation systems and tiles (with dedicated optional kit)

*In combination with a plaster sprayer or mortar pump, it can form a single mixing and pumping unit.*

### Spin 15A Cappotto

For mixing fine mortar for laying thermal insulation systems and tiles, thanks to a dedicated mixing kit, which is supplied as standard on Spin 15A Cappotto.



✓ Ergonomic controls

✓ Maximum safety for the operator: the automatic mixing lock is enabled when the mixing chamber is removed, in observance of EC regulations

✓ Patented IMER gear motor with direct transmission for high performance

✓ Adjustable height (950, 1095 and 1165 mm)



✓ High motor torque for optimum start-up with full load



✓ In combination with a plaster sprayer or mortar pump, it can form a single mixing and pumping unit

✓ Easy to disassemble, clean and maintain




## EASY thermal insulation system

Spin 15A can be supplied with a dedicated mixing kit and combined with a mortar pump i.e. **Small 50** for mixing and pumping non-stop fine mortar and smoothing products.



✓ Easy to transport thanks to low bulk and weight, and to the perfect balance of the machine

### ACCESSORIES

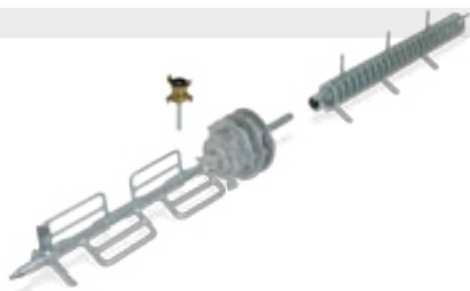

Fine mortar mixing kit  
(standard for Spin 15A Cappotto version)



Litre counter

		SPIN 15	SPIN 15A	SPIN 15A Cappotto
Supply	-	230V/50Hz	230V/50Hz	230V/50Hz
Motor power rate	kW	1.4	1.4	1.4
Mixer/paddle speed	rpm	280	280	280
Mixing performance	l/min	15-18	15-18	7
Hopper/tank capacity	l	60	60	60
Standard water pump	-	no	yes	yes
Loading height	mm	1165/1095/950	1165/1095/950	1165/1095/950
Dimensions width/length/h	mm	720/1380/1165-950 (max-min)	720/1380/1165-950 (max-min)	720/1380/1165-950 (max-min)
Box dimensions width/length/h	mm	800/590/830	800/590/830	800/590/830
Weight (with packing)	kg	78 (82)	78 (82)	78 (82)
Sound pressure level	dB(A)	<65	<65	<65